


5320. Führungsbuchsen mit Bund
Bronze mit Festschmierstoff

i Produkteigenschaften

Material: Bronze mit Festschmierstoff, wartungsarm
Härte: HB10: 190 - 220
Hinweis: Aufnahmebohrung H7

Zeichnung zu 5320.

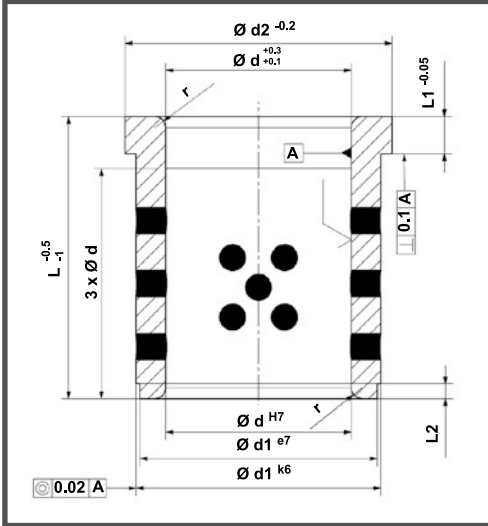

Bestellbeispiel:

5320.040.076
Führungsbuchsen mit Bund
 $d = 40,0 \text{ mm}$
 $L = 76,0 \text{ mm}$

Tabelle zu 5320.

$\varnothing d$	9	10	12	14	15	16	18	20	22	24	30	32	40	42	50	60
$\varnothing d1$	14	14	18	20	20	22	26	26	30	30	42	42	54	54	66	80
$\varnothing d2$	16	16	23	25	25	27	31	31	35	35	47	47	60	60	72	86
L1	3	3	6	6	6	6	6	6	6	6	6	6	10	10	10	20
L2	2	2	3	3	3	3	3	3	3	3	3	3	4	4	4	4
r	1	1	1,5	1,5	1,5	1,5	1,5	1,5	1,5	2	2	2	3	3	3	3

L	9	10	12	14	15	16	18	20	22	24	30	32	40	42	50	60
12	●	●														
17	●	●	●	●	●	●	●	●	●	●						
22	●	●	●	●	●	●	●	●	●	●						
27	●	●	●	●	●	●	●	●	●	●	●	●				
36	●	●	●	●	●	●	●	●	●	●	●	●	●			
46				●	●	●	●	●	●	●	●	●	●			
56				●	●	●	●	●	●	●	●	●	●	●		
66							●	●	●	●	●	●	●	●		
76								●	●	●	●	●	●	●	●	
86								●	●	●	●	●	●	●	●	
96											●	●	●	●	●	●
116											●	●	●	●	●	●
136													●	●	●	●
156													●	●	●	●
196															●	●

Maße ohne Toleranzangabe | DIN ISO 2768 mittel